

## LED-NEON 12 V (DC)



### LED - Profil Topaz

In alluminio col. argento anodizzato e vetro acrilico satinato (PMMA) colore bianco o blu.  
In aluminium and satinized acrylic glass (PMMA). White or blue.


### Modi d'impiego

Luci orientamento, strade, scale, facciate palazzi

### Applications

Orientation lights, streets stairs, palace faces

Tensione/Voltage	12 Vdc
Grado di protezione/Protection degree	IP 65
LED	SMD, bianco typ. 6500k
Pressacavo	M12x1,5
Cavo/Cable	4,0 m H05RN-F2x0,75
Angolo luminoso/Luminous angle	ca. 270°

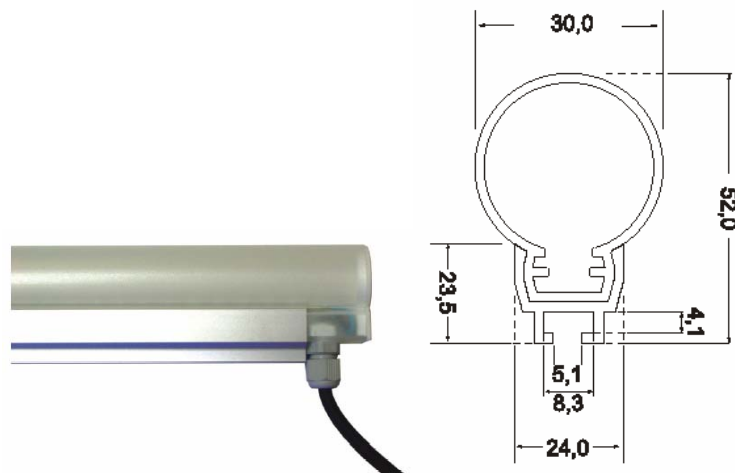

Codice Code	Lunghezza Length	Colore vetro acrilico Acrylic glass color	Quantità LED LED quantity	Potenza Power	Corrente Current
550-897-50	1000mm	Bianco	90	7,5 W	0,63 A
550-897-54	1000mm	Blu	90	7,5 W	0,63 A
550-898-50	1980mm	Bianco	180	15,0 W	1,25 A
550-898-54	1980mm	Blu	180	15,0 W	1,25 A